


MR-AJ330A-Series

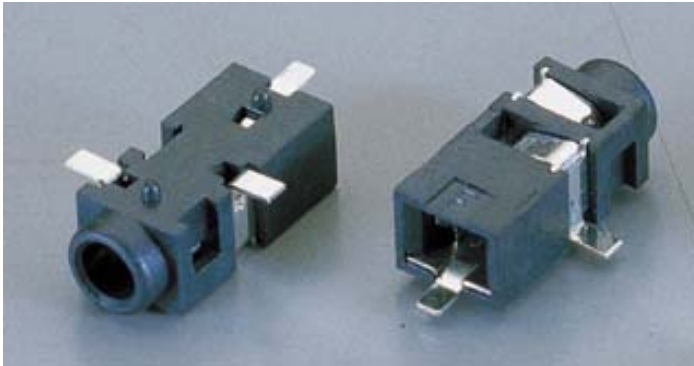

3.5mm Audio Jack for Audio Application Surface Mount and also Available in Through Hole

- Designed for Audio Applications
- Mates with 3.5mm Audio Plug
- Plastic Body Metal Tabs

**Performance Specifications
Materials and Finish**

Housing : High Temperature Thermoplastic, Black Color
UL94V-0 Rated
Terminals: Copper Alloy, Silver over Nickel Plating

Mechanical Characteristics

Insertion Force : 3.0kg Max.
Extraction Force : 0.2kg Mm.
Durability : 5000 Mating Cycles

Electrical Characteristics

Contact Resistance
Before Durability Test : 50 Milliohms Max.
After Durability Test : 100 Milliohms Max.

Rated Voltage: 16VDC
Rated Current: 0.3 Amp

Insulation Resistance: 100 Megohms Min. at 500V DC
Dielectric Strength : 500V AC RMS for 1 Minute
Operating Temperature -25°C to + 85°C

MR-AJ330A-Series

Dimensions in mm

